Typical Trim Details Used in the Installation of U-Panel, R-Panel & Corrugated Metal Roofing

STANDARD TRIM FLASHING

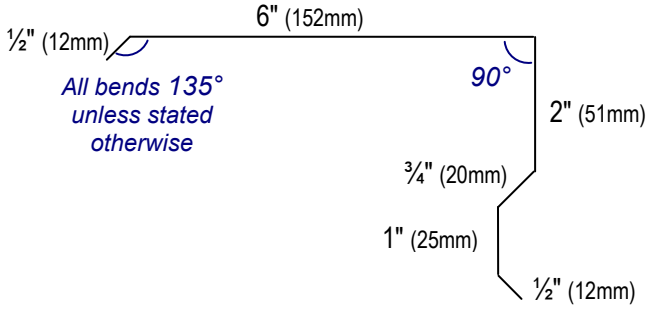

Standard Lengths: 10ft, 12ft, 16ft — *¼ Girth 1086mm*

STANDARD WALL FLASHING

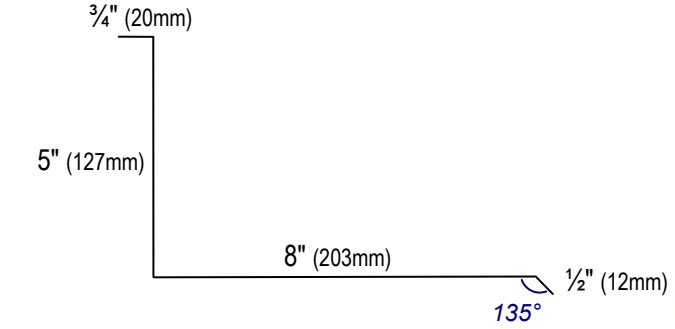

Standard Lengths: 12ft, 16ft — *⅓ Girth 1086mm*

STANDARD VALLEY GUTTER

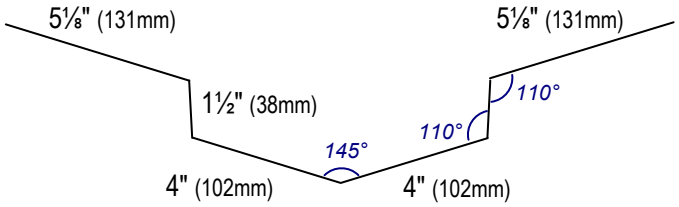

Standard Lengths: 12ft, 16ft, 20ft — *½ Girth 1086mm*

TYPICAL COUNTER FLASHING

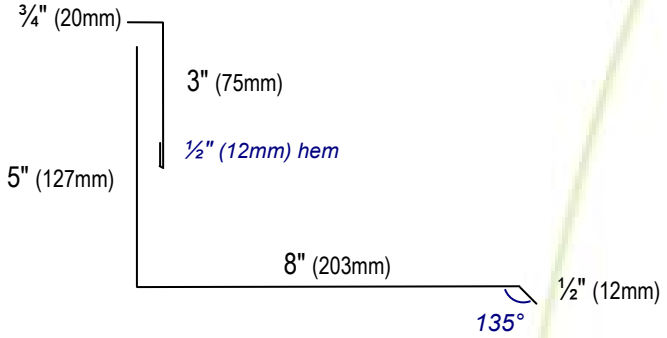

STANDARD RIDGECAP x 18" WIDE

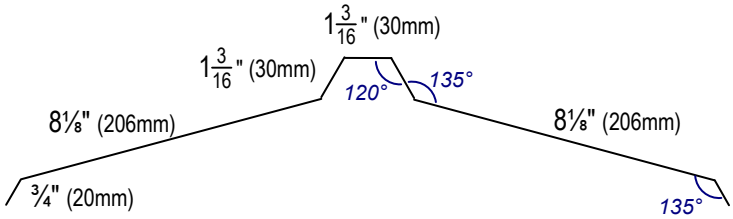

Standard Lengths: 10ft, 12ft, 16ft, 20ft — *½ Girth 1086mm*

STANDARD RIDGECAP x 12" WIDE

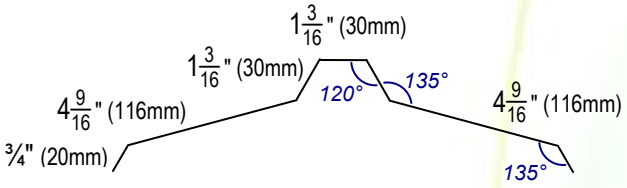

Standard Lengths: 10ft — *⅓ Girth 1086mm*

TYPICAL DRIP EDGE

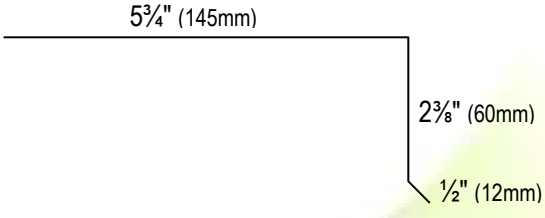

TYPICAL HIP CAP

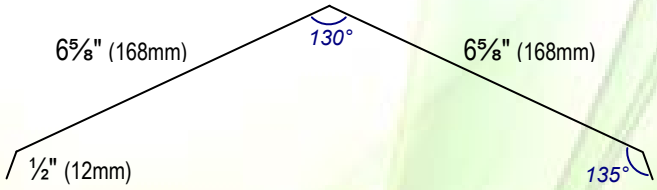

⅓ Girth 1086mm

BRC West Indies Limited | Cane Garden | St. Thomas BB22118 | Barbados.
(246) 425-0371 | (246) 425-2941 | info@brcwestindies.com | http://www.brcwestindies.com

Working To Build A Stronger Nation